








OLA-12-150-P



Olalitia Smart BMS LiFePO4 Battery

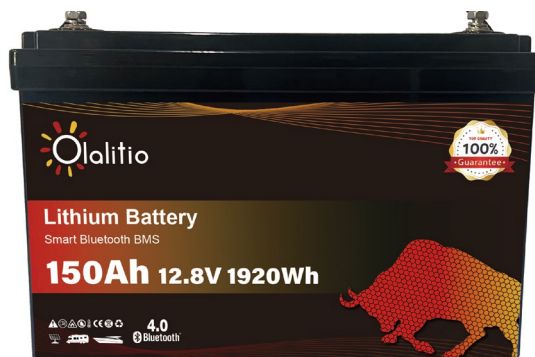

BASIC INFORMATION

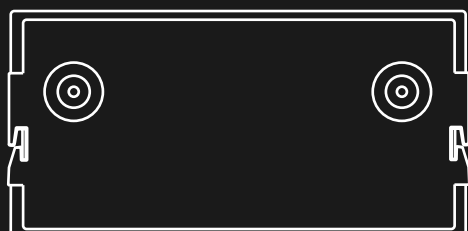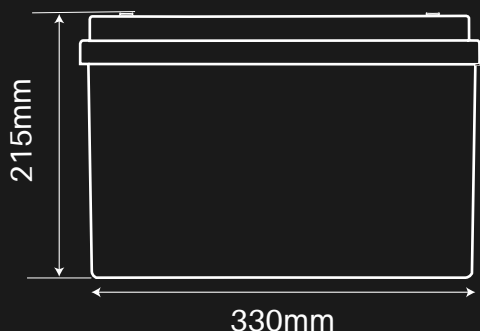

Basic information	Model	OLA-12-150-P
	BMS (Battery Management System)	Integrated
	Rated capacity	150Ah / 1920Wh
	Rated voltage	12.8V
	Number of cycles	>6000 @ 80% D.o.D
	Weight	13kg
	Dimension with terminals (L x W x H)	330*172*215mm
	Operating voltage range	10 -14.6V
	Warranty	5 years
Charge	Charging characteristics	CCCV / IU
	Recommended charge voltage	14.6V
	Recommended charge current	45A
	Maximum charge current	75A
Discharge	Continuous discharge current	200A
	Maximum discharge cut-of current	450A (200~500ms)
Temperature	Discharge temperature range	-20 ~ 75 °C
	Charge temperature range	0 ~ 50 °C
	Storage temperature range	-5 ~ 35 °C
Material	Material of case	ABS
	Terminals	M8
	Ingress protection code	IP65
Intelligent monitoring	Bluetooth	Integrated Bluetooth 4.0 module Allowing to control and read the battery status and showing errors under extreme conditions like overloads, overheating and short circuit, etc. on your smart-phone
	Connection	Max. 4 Series and 4 Parallel Connections


PERFORMANCE CHARACTERISTIC


EUROPE QUALITY

- The safest technology, without risk of fire or explosion
- Long useful life
- Constant improvement of the capacity of storage
- Great stability even under extreme loads
- No memory effect; no need to fully discharge and recharge

APPLICATIONS

 Motorhome; Caravan

 Boat; Yacht

 Photovoltaic; Renewable energy



OLALITIO S.L.


Polígono BTV, C/ Tamariz 62,
La Puebla de Alfindén, 50171,
ZARAGOZA, SPAIN.

Tel: +34 876434005


Email: contacto@olalitia.com

V1.06.08.25


Discharge performance at 25°C

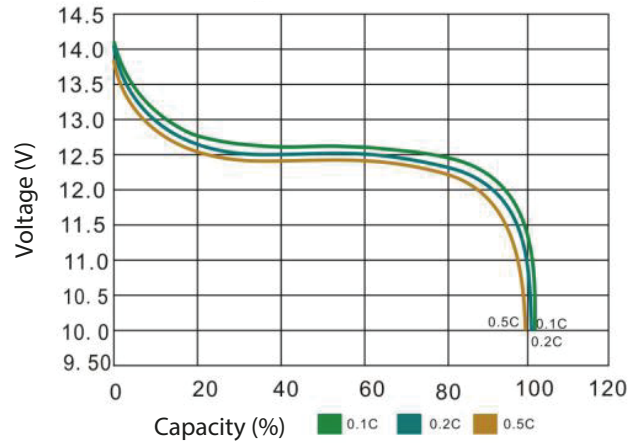

Temperature effect on capacity at 0.2C

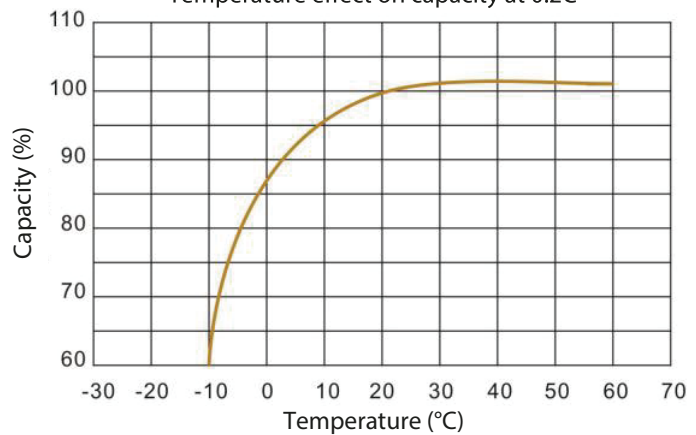

Charge and Discharge at 25°C, 0.2C

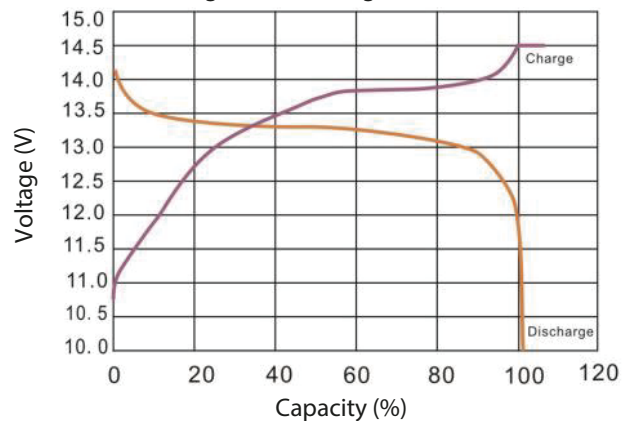

Cycle Life with DOD at 25°C, 0.2C

